

For Commercial and Food Service Applications

Job Name _____

Contractor _____

Job Location _____

Approval _____

Engineer _____

Contractor's P.O. No. _____

Approval _____

Representative _____

LEAD FREE*

Models OF210-1, OF220-2 and OF240-4

OneFlow® Anti-Scale System

Connection Sizes: ½" and ¾" (15 and 20mm)

Flow Rates: From 0.5 gpm to 4 gpm (1.9 lpm to 15.2 lpm)

The OneFlow® Anti-Scale System with two filter housings provides protection from scale formation and reduces chlorine and other off tastes to improve overall water quality in Food Service applications. The OneFlow® system is a dual cartridge-based system that may be installed on a cold water line prior to a water-using device (coffee maker, espresso machine, post-mix system or other appliance) that requires protection from the ill effects of hard water. OneFlow® works exceptionally well where the water is being heated or brought to steam.


OneFlow® prevents scale by transforming dissolved hardness minerals into harmless, inactive microscopic crystal particles. These crystals stay suspended in the water and are passed to drain, thereby having a greatly reduced ability to react negatively like dissolved hardness does. The system requires very little maintenance, no backwashing, no salt, and no electricity. Typical hardness problems, especially build-up of scale in heating elements, boilers, and steamers, are no longer a concern.

OneFlow® is not a water softener. It does not add chemicals or remove any minerals. It is a scale prevention device with proven third party laboratory test data and years of successful Food Service and Commercial applications. OneFlow® is the intelligent scale solution with chlorine reduction as a great alternative to water softening (ion exchange) or scale sequestering devices.

Features

- Chemical free scale prevention and protection - converts hardness minerals to harmless, inactive microscopic crystals making OneFlow® effective alternative technology to a water softener for the prevention of scale due to water hardness and for the reduction of chlorine for better taste and odor
- Virtually maintenance free - No salt bags or other chemicals to constantly add or maintain
- No control valve, no electricity and no wastewater

*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.

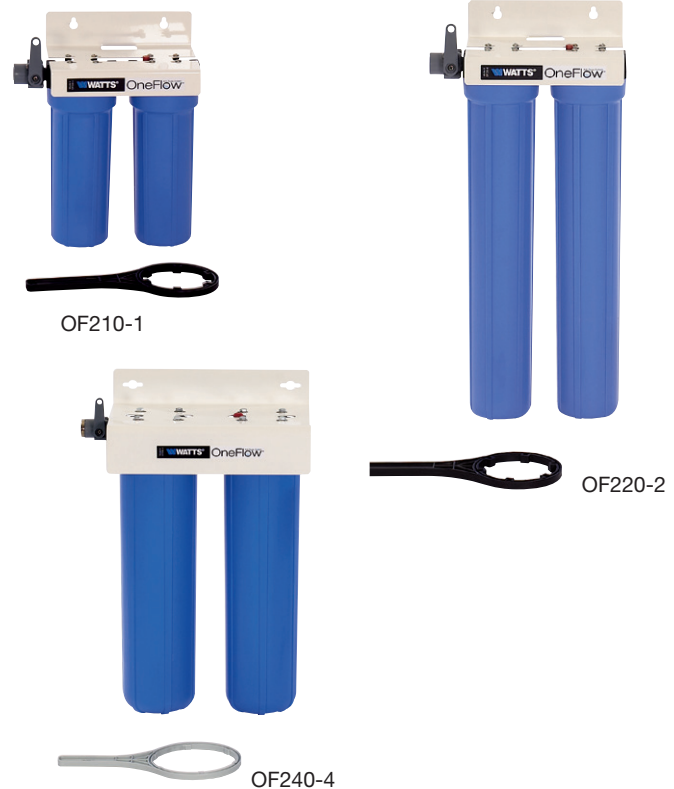

- Uses environmentally friendly "green" technology
- Improves efficiency of all water appliances whether heating the water or not
- Simple sizing & installation – all you need to know is pipe size and flow rate
- Perfect system for restaurants, cafeterias and coffee shops where multiple or single equipment protection is desired for longer equipment life and reduced energy consumption
- Inlet ball valve for easy isolation shutoff and filter changes
- OneFlow® does not remove the essential minerals in water that are linked to good health
- OneFlow® cartridge-based systems are easily maintained; change the carbon cartridge every 6 months and the OneFlow® media cartridge once per year.

NOTICE

For hot water applications where water temperature is 110°F - 150°F (43°C - 66°C), please consult ES-OneFlow-Hot Water.

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.

Models

Model	Maximum Flow Rate	Connection Sizes
OF210 – 1	1 gpm (4 lpm)	½" (15mm) FNPT
OF220 – 2	2 gpm (8 lpm)	½" (15mm) FNPT
OF240 – 4	4 gpm (15 lpm)	¾" (20mm) FNPT

Replacement Cartridge

OF110RM	Cartridge should be replaced every 12 months
OF120RM	Cartridge should be replaced every 12 months
OF140RM	Cartridge should be replaced every 12 months
OF210RC	Cartridge should be replaced every 6 months
OF220RC	Cartridge should be replaced every 6 months
OF240RC	Cartridge should be replaced every 6 months

Specifications

A OneFlow® scale prevention system with added carbon filtration shall be installed on the cold water service line to condition and filter the tap water just prior to the service line feeding the equipment it is designed to protect. The system will be sized for maximum or peak flow rate based on the specification of said equipment. A OneFlow® system with added carbon filtration may also be installed to protect multiple pieces of equipment from the ill-effects of hard water scale and taste/odor concerns provided the aggregate peak flow rate for each piece of equipment it is protecting has been considered. The system shall be plumbed with a bypass valve to allow isolation of filter housings to allow the bypass of untreated water in the event that service or cartridge replacement is necessary. The installation area should be suitable in size for the housing to be serviced without encumbrance and the system should be installed per the Installation, Operation & Maintenance manual as provided with each system.

The OneFlow® system must not require additional waste water to backwash, flush, or regenerate once put into service. The system shall not require any chemical additives and shall not require electricity for operation.

Standards

Independent scientific testing has confirmed Template Assisted Crystallization (TAC) technology provides scale reduction of over 95+%. Testing was conducted under protocol based on DVGW W512 test to access control of scale formation.

NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

Feed Water Chemistry Requirements

pH	6.5-8.5
Hardness (maximum)	30 grains (513 ppm CaCO ₃)*
Water Pressure	10 psi to 90 psi (0.69 bar to 6.2 bar)
Temperature	40° F to 100° F (5°C to 38°C)
Free Chlorine	<2 ppm
Iron (maximum)	0.3 ppm**
Manganese (maximum)	0.05 ppm**
Copper	1.3 ppm***
Oil & H ₂ S	Must be Removed Prior to OneFlow
Total Phosphates	< 3.0 ppm
Silica (maximum)	20 ppm †
TDS	1500 mg/l ††

NOTICE

* Systems using OneFlow® technology are effective at controlling lime-scale formation inside the plumbing system at influent hardness levels up to 75 grains per gallon (1282 mg/l) CaCO₃ of calcium carbonate. Due to variances in water chemistry, 30 grains per gallon is a recommended hardness maximum due to potential aesthetic issues related to soft scale residue formation outside of the plumbing system. Testing should be performed to determine proper application where hardness levels exceed 30 grains per gallon.

** Just as with conventional water softening media, OneFlow® media needs to be protected from excess levels of certain metals that can easily coat the active surface, reducing its effectiveness over time. Public water supplies rarely, if ever, present a problem, but if the water supply is from a private well, confirm that the levels of iron (Fe) and manganese (Mn) are less than 0.3 mg/L and 0.05 mg/L, respectively.

WARNING

*** Pursuant to the EPA drinking water standards, the copper concentration permitted is up to 1.3 ppm. Typically originating from new copper plumbing, high levels of copper can foul OneFlow media. New Copper lines need to be passivated for a minimum of 4 weeks before placing unit into service. For applications with copper concentration greater than 1.3 ppm, please consult Watts Water Quality Technical Service. To further minimize any problem with excess copper, avoid applying excessive flux on the inner surfaces of the pipe and use a low-corrosivity water soluble flux listed under the ASTM B813 standard.


NOTICE

† OneFlow® media does not reduce silica scaling. While silica tends to have a less significant effect on scale formation than other minerals, it can act as a binder that makes water spots and scale residue outside the plumbing system difficult to remove. This 20 ppm limitation is for aesthetic purposes.

†† All other contaminants must meet the requirements of the USEPA Safe Drinking Water Act. Specific Mineral and Metal MCL's, identified in Watts published Feed Water Chemistry Requirements, supersedes the USEPA SDWA.

Water known to have heavy loads of dirt and debris may require pre-filtration prior to OneFlow®.

Dimensions — Weights

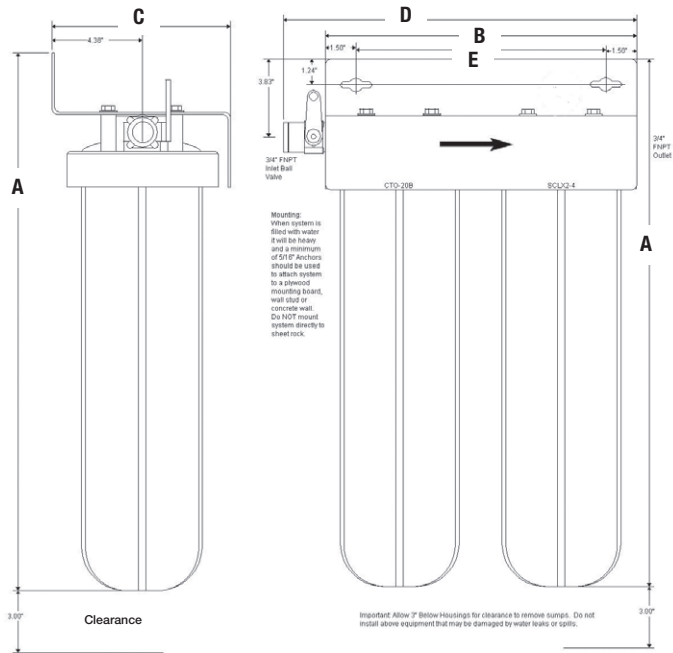

Model	Dimensions										Weight	
	A		B		C*		D		E*		lbs.	kgs.
	in.	cm	in.	cm	in.	cm	in.	cm	in.	cm		
OF210-1	14½	37	9¼	24	5⅛	13	11¼	29	5¾	15	9	4.1
OF220-2	24½	62	9¼	24	5⅛	13	11¼	29	5¾	15	14	6.4
OF240-4	26	66	15¼	39	8⅝	22	17⅝	44	12¼	31	31	14.1

The overall height and the height of the fitting varies due to material variations and assembly tolerances. Please allow additional clearances above the tank for making connections.



USA: Tel: (978) 689-6066 • Fax: (978) 975-8350 • Watts.com
 Canada: Tel: (905) 332-4090 • Fax: (905) 332-7068 • Watts.ca
 Latin America: Tel: (52) 55-4122-0138 • Watts.com